


**IMPORTANT** - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.


**⚠ DISCONNECT THE MAIN LINE BEFORE WIRING SECONDARY CONNECTORS.**

**IN-LINE UNIT INSTALLATION  
INTEGRAL DRIVER (120 / 277V)  
DIMMING TRIAC/ELV (15%), 0-10V (1%), LUTRON HI-LUME® (1% EcoSystem™ / 1% 2-WIRE)**


- A- PREPARE CEILING WITH ANCHOR SCREWS (SEE TABLE ON PAGE 3).
- B- SEE DETAIL:
- 1- PASS THE WIRES THROUGH THE CANOPY.
- 2- MAKE NECESSARY WIRE CONNECTIONS (SEE WIRING DIAGRAM) USING TWIST CONNECTORS (NOT INCLUDED).
- FOR D10 AND D2B DIMMING:** WIRES MUST BE RUN THROUGH A SEPARATE KNOCKOUT HOLE FROM JUNCTION BOX.
- 3- INSTALL UNIVERSAL CROSSBAR USING 8-32 PHILLIPS SCREWS (INCLUDED) AND THE CANOPY USING 8-32 PHILLIPS SCREWS (INCLUDED).
- C- INSTALL THE ALUMINUM EXTRUSION TO THE CEILING USING 8-32 PHILLIPS SCREWS (NOT INCLUDED) INTO THE ANCHOR SCREWS.
- D- CONNECT THE LIGHTING FIXTURE USING THE QUICK CONNECTORS (INCLUDED) AND SNAP LIGHTING FIXTURE AND/OR COVER PLATE BACK INTO THE ALUMINUM EXTRUSION.

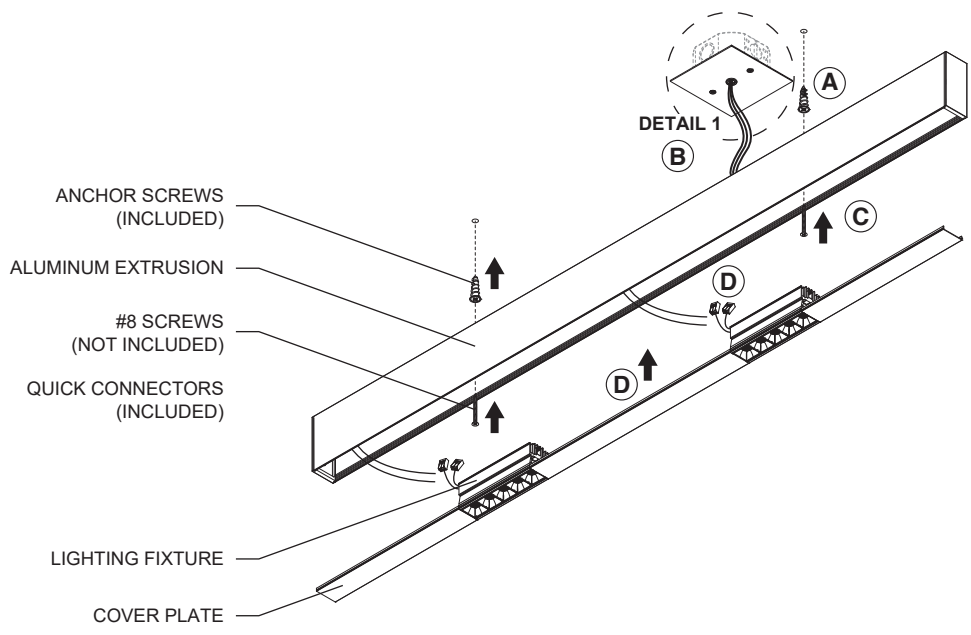

**DETAIL 1**

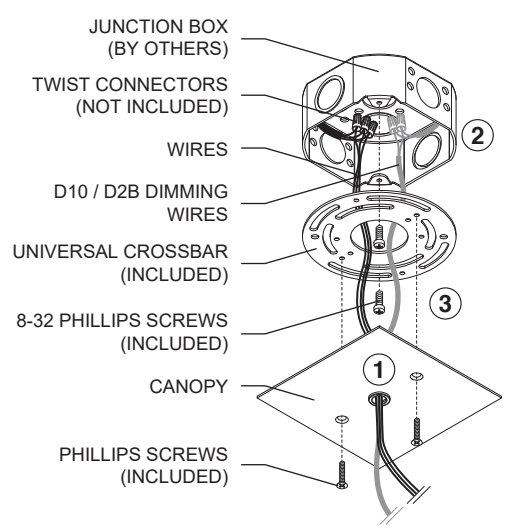


**WIRING DIAGRAM\***

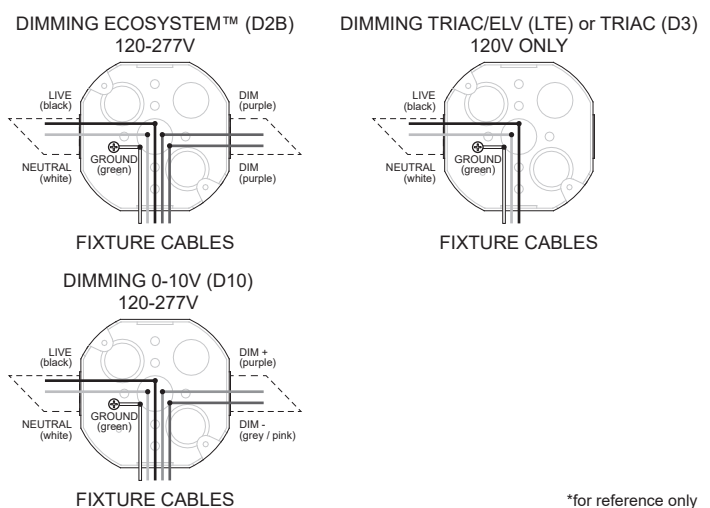


\*for reference only

**SURFACE ANCHOR POINTS DISTANCE**

**SOLO UNIT 4'**

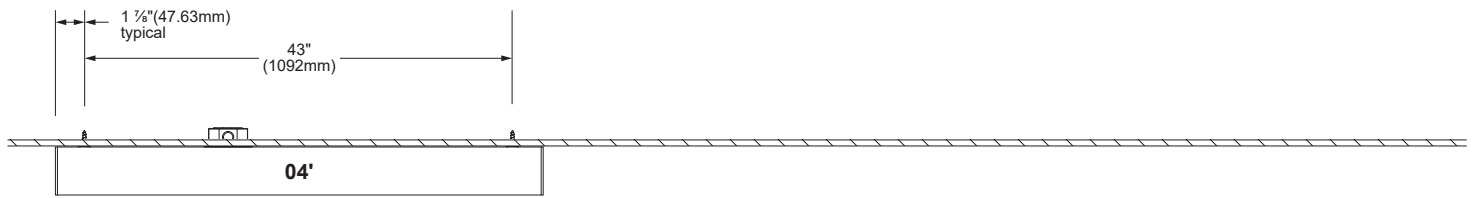

**SOLO UNIT 8'**

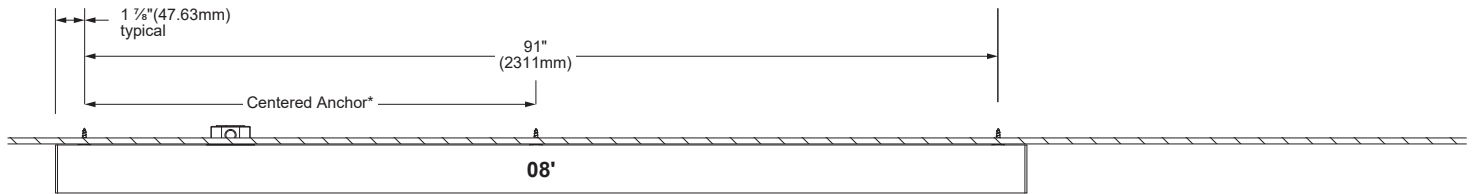

\*Units over 4' nominal length require a centered anchor.

ANCHOR POINTS FOR LINEAR SURFACE ALL CONFIGURATIONS		
Nominal length	Actual length	Anchor qty
<b>04'</b>	3'-10 <sup>3</sup> / <sub>4</sub> " (1.187m)	2
<b>08'</b>	7'-10 <sup>3</sup> / <sub>4</sub> " (2.407m)	3